

BMS Mini 3 (MNC034)

INTRODUCTION

EMUS BMS Mini 3 (MNL034) is a compact, all-in-one BMS device, that autonomously executes all core and utility functions of battery management. It interacts with all other components in the system, monitors cell voltage levels, and controls charging and balancing functions, using various inputs, outputs, and interfaces.

It is designed to use for battery packs consisting of 6 up to 16 cells connected in series.



APPLICATIONS

Any lithium chemistry, series-connected battery pack, or a pack of multiple parallel strings, from minimum 6 of up to 16 cells:

- AGV, UGV
- Scooters
- Bikes
- 2-wheelers, 3-wheelers
- Motorcycles.
- Mobile energy storages.

FEATURES

- USB interface that is intended for quick and straightforward connection to a host device (e.g. computer, tablet, smartphone) when configuration, diagnostics, or maintenance is needed.
- CAN data interface. Enables to communicate with CAN equipped EMUS devices and third-party devices.
- Supports 50, 125, 250, 500, 800 kbit/s and 1 Mbit/s CAN baud rates (default 250kbit/s).
- RS232, a single-ended transmission mode protocol, allows continuously monitor BMS activity using first-party or third-party devices (feature to be active in Q3 2021).
- RS485 is a differential transmission mode protocol, which allows to continuously monitor BMS activity and control chargers (feature to be active in Q3 2021).
- SD card enables to store all sent messages from the EMUS BMS Mini 3 and recover all unexpected situations which occurred in the past (feature to be active in Q3 2021).
- Each BMS Mini 3 monitor from 6 up to 16 battery cells.
- State of Charge (SOC) and State of Health (SOH) (gen1 algorithm) allows to monitor cell's degradation factors. SOC calculations depend on real cell capacity and internal cell parameters.

MECHANICAL INFORMATION

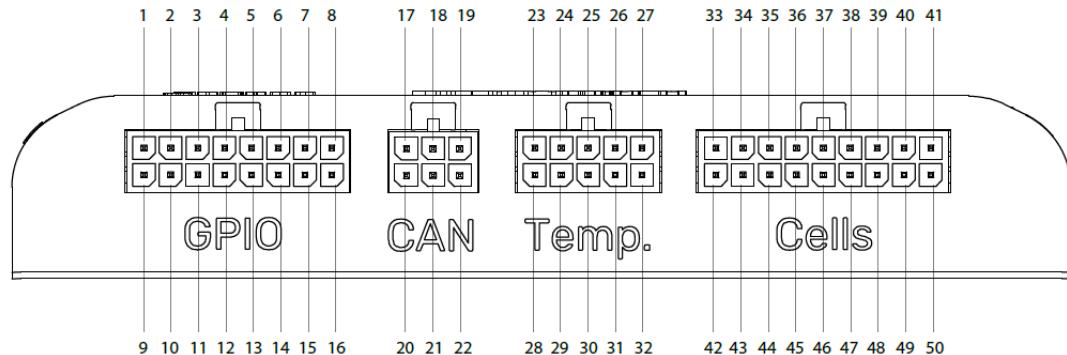


Figure 1 BMS MINI 3 (MNL034) pinout

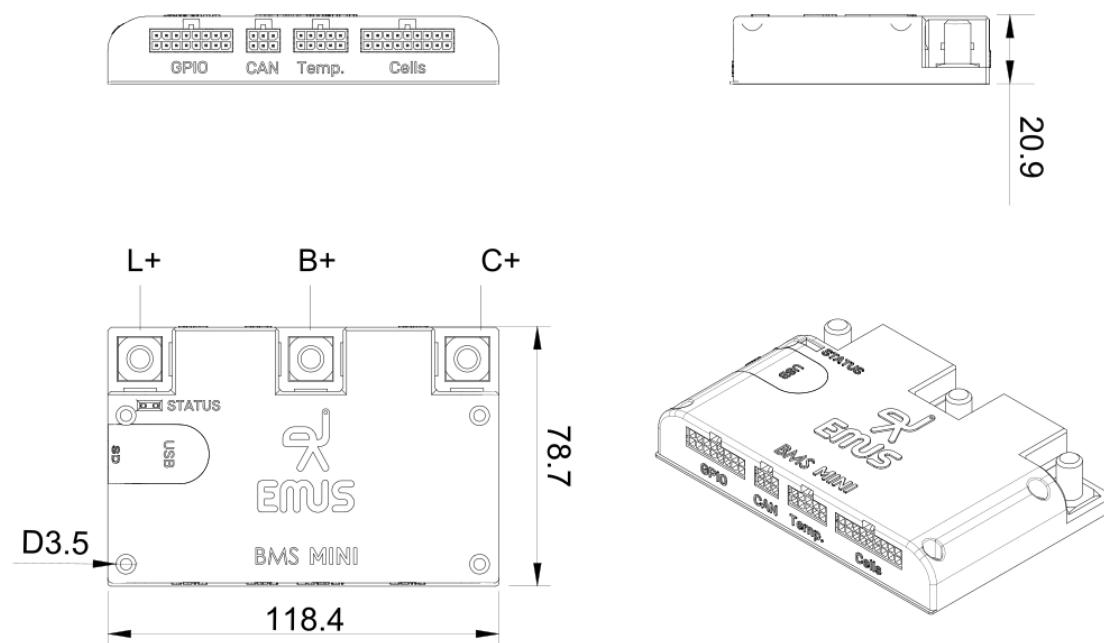


Figure 2 EMUS Mini 3 (MNC034A) dimension

Pin No.	Assignment	Mating Housing	Terminal		
1	TEMP_EN	Micro-Fit 3.0 Receptacle Housing 43025-1600	Molex MicroFit 43045-1600 (recommended crimp tool Molex Hand Crimp Tool P/N: 638190000)		
2	GPAI2				
3	GPO1				
4	GPO2				
5	GPO3				
6	GPO4				
7	RS232_TX				
8	RS485_A				
9	GND				
10	GPAI1				
11	GPI1				
12	GPI2				
13	GPI3				
14	GPI4				
15	RS232_RX				
16	RS485_B				
17	AUX_BAT_SENS	Micro-Fit 3.0 Receptacle Housing 43025-0600	Molex MicroFit 43045-0600 (recommended crimp tool Molex Hand Crimp Tool P/N: 638190000)		
18	GPO5				
19	CAN_H				
20	GND				
21	GPI5				
22	CAN_L				
23	TEMP1	Micro-Fit 3.0 Receptacle Housing 43025-1000	Molex MicroFit 43045-1000 (recommended crimp tool Molex Hand Crimp Tool P/N: 638190000)		
24	TEMP2				
25	TEMP3				
26	TEMP4				
27	TEMP5				
28	GND				
29					
30					
31					
32	-	Micro-Fit 3.0 Receptacle Housing 43025-1800	Molex MicroFit 43045-1800 (recommended crimp tool Molex Hand Crimp Tool P/N: 638190000)		
33	CELL15+				
34	CELL13+				
35	CELL11+				
36	CELL9+				
37	CELL7+				
38	CELL5+				
39	CELL3+				
40					

41	CELL1+		
42	CELL16+		
43	CELL14+		
44	CELL12+		
45	CELL10+		
46	CELL8+		
47	CELL6+		
48	CELL4+		
49	CELL2+		
50	CELL1-		

ELECTRICAL CHARACTERISTICS

Item	Conditions	Value
Operating voltage		12 to 72.8 VDC
Current consumption	At typical supply voltage, with nothing else connected	12 VDC typical 28 mA 72.8 VDC typical 10 mA
General purpose output GP01-GP05 max sinking current (resettable fuse trip current)		1.25A
General purpose output max voltage		32 VDC
General purpose input ON voltage		5 to 72.8 VDC
General purpose input OFF voltage		0 VDC
USB interface controller		F232R
USB power supply data line transient/overvoltage protection	VS protection (Pd - 85W)	6V
RS232 interface voltage	TVS protection (Pd - 200W)	-15V to 15V
USB/RS232 interface galvanic isolation		None
CAN interface	TVS protection (Pd - 350W)	-24V to 24V
RS485 interface voltage	TVS protection (Pd - 600W)	-7V to 12V
USB interface duplexity	USB not connected	Full duplex (send and receive)
RS232 interface duplexity	USB connected	Full duplex (send and receive)
		Half duplex (send only)
USB/RS232 interface baud rate		57.6kbps
USB/RS232 interface data bits		8 bits

USB/RS232 interface parity			None
USB/RS232 interface stop bits			1 bit
External temp sensors			5
Individual cell voltage limits	Firmware v2.x	2V to 4.55V	
	Firmware v3.x and above	1V to 4.95V ¹	
Individual cell voltage measurement accuracy	Firmware v2.x	12mV	
	Firmware v3.x and above	2mV	
Individual cell voltage measurement resolution	Firmware v2.x	10mV	
	Firmware v3.x and above	1mV	
CAN speeds			50, 125, 250, 500, 800 kbit/s and 1 Mbit/s
Load current	Continuous	without heatsink	100A
		with heatsink ²	200A
	Peak	without heatsink, 10s	250A
		with heatsink, 60s	300A
Charge current	Continuous	without heatsink	50A
		with heatsink	100A
	Peak	without heatsink, 10s	100A
		with heatsink, 60s	150A
Balancing	Resistor		8.2 Ohm
	Current @4.2V		500mA
Pre-Charge Resistor			250 Ohm

OTHER SPECIFICATIONS

Item	Condition	Value
Number of cells limits		6 to 16 cells ³
Operating temperature		-40°C to +85°C
Maximum number of external temperature sensors		5
External temperature sensor measurement accuracy		±5°C
External temperature sensors measurement resolution		1°C
IP rating		IP40
Weight		0.154kg
Terminal tightening torque on M8 L+, C+, B+ terminals	Maximum	15Nm
	Destruction	18Nm

¹ Maximum voltage per cell is limited by full pack voltage depending on number of cells used.

² Used Heatsink with at least 0.7 K/W thermal resistance.

³ Minimum cells count depends on full battery pack voltage. Minimum full battery pack voltage must be above 12V.

■ COMPATIBLE CHARGERS AND INVERTERS

Charger Name	Communication Protocol
Elcon	CAN J1939-based
Zivan RE	CAN Zivan proprietary
Powerfinn	CAN
Delta-Q	CANOpen - based
Non-CAN	I/O Controlled

 **NOTE:** More chargers, inverters integrations are planned for the next release in Q3 2021.

 **NOTE:** For all chargers recently supported please refer to <https://emusbms.com>.

 **NOTE:** For more information on each charger communication protocol, contact the charger manufacturer.